




- Fire insert, 2-sided, open
- Glass 1-leafed
- 4545 - for tile size 22, H 45 cm  
4551 - for tile size 25, H 51 cm  
4557 - for tile size 28, H 57 cm
- Optional: Self-closing door, A1
- The lower panel for the secondary air is adjustable for an excellent glass wash
- Standard inner lining: vermiculite, plain
- High-quality cast-iron dome, all parts are movable, adjustment from 0° to 90°
- Easy and fast adjustment of the construction height.
- Easily dismantles for transportation

Optional designs:

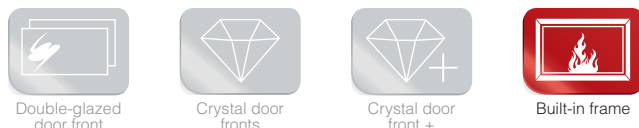

Optional comfort features:



## Ekko 45(45)80 h

### Specifications

Rated thermal output	kW	7
Output range (depending on the fuel quantity)	kW	3,2 – 7,1
Efficiency	%	> 78
Insulation rear / side walls	mm	80 / 80
Ø Supply air line for external air connection	mm	125
Weight (depending on the equipment)	kg	250
Heat emission through glass	%	50
Convective heat	%	50

### Data for chimney sweepers or responsible authority according to DIN EN 13384

(closed operation: A1 / open operation: A)

Triple value for NWL	Flue gas mass flow	g/s	A1	6,8
		g/s	A	14,7
	Flue gas temperature at the connector	°C	A1	310
		°C	A	230
	Required draught at the connector	mbar	A1	0,12
		mbar	A	0,10

### Extension tank (4 storage rings)

Rated thermal output	kW	---
Efficiency	%	---

### Hot air pipe coil extension

Rated thermal output	kW	---
Efficiency	%	---

### Reheater box

Rated thermal output	kW	---
Efficiency	%	---

### Hot air pipe coil extension

Rated thermal output	kW	---
Efficiency	%	---

### Tested method DIN EN 13229

and in accordance with Regulation Art. 15a B-VG

Testing report nr.: RRF - 29 06 1077



1. BImSchV. level 1

1. BImSchV. level 2




More informations:

# Ekko


## 45(45)80 h

In our brochure we present a wide variety of accessories.

Front view M 1:20

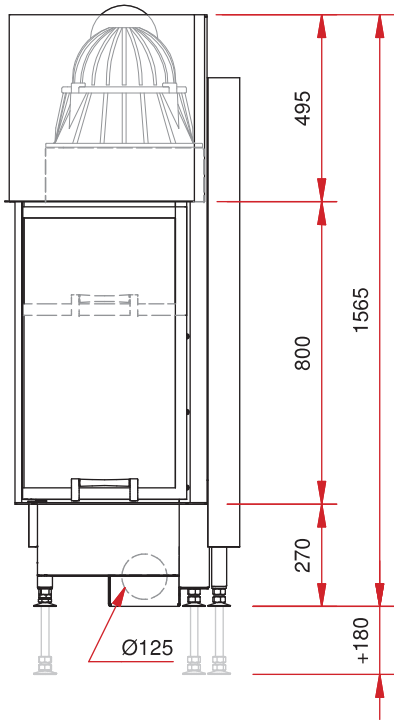

Side view M 1:20

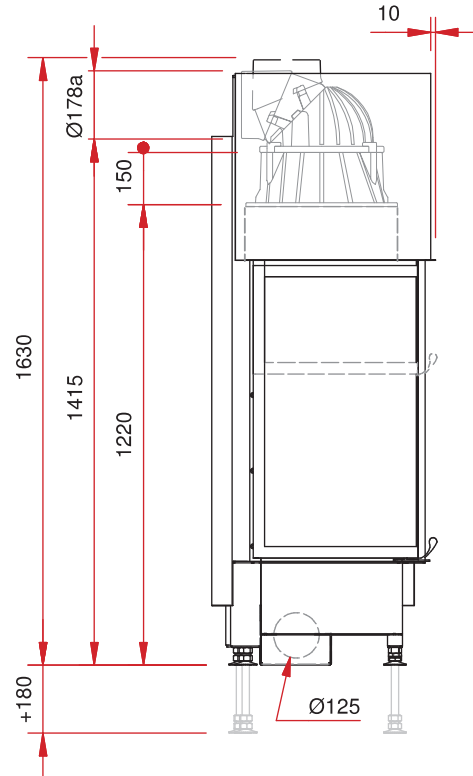

Top view M 1:10

