


## Ekko

### L 55(34).. h

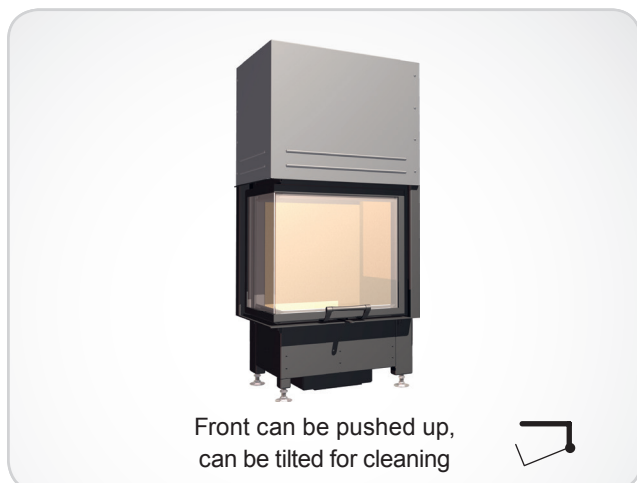

Front can be pushed up,  
can be tilted for cleaning

- Fire insert, 2-sided, open
- Shallow depth
- Glass 1-leafed
- 5551 - for tile size 25, H 51 cm  
5557 - for tile size 28, H 57 cm
- Optional: Self-closing door, A1
- The lower panel for the secondary air is adjustable for an excellent glass wash
- Standard inner lining: fire clay, plain
- High-quality cast-iron dome, all parts are movable, adjustment from 0° to 90°
- Easy and fast adjustment of the construction height.
- Easily dismantles for transportation

#### Optional designs:



Double-glazed door front



Crystal door fronts



Crystal door front +



Built-in frame

#### Optional comfort features:



Outside air connector



External firing



Reheater box



Hot air pipe coil extension



Extension tank



Water technology



Tunnel version



Secondary air device




Hot air jacket



Hypocausts



Electronic door actuator



SMS

#### Specifications

Rated thermal output	kW	5
Output range (depending on the fuel quantity)	kW	2,4 – 5,3
Efficiency	%	> 78
Insulation rear / side walls	mm	80 / 80
Ø Supply air line for external air connection	mm	125
Weight (depending on the equipment)	kg	250 – 270
Heat emission through glass	%	50
Convective heat	%	50

#### Data for chimney sweepers or responsible authority according to DIN EN 13384

(closed operation: A1 / open operation: A)

Triple value for NWL	Flue gas mass flow	g/s	A1	5,0
		g/s	A	---
	Flue gas temperature at the connector	°C	A1	275
		°C	A	---
	Required draught at the connector	mbar	A1	0,12
		mbar	A	---



#### Extension tank (4 storage rings)

Rated thermal output	kW	---
Efficiency	%	---



#### Hot air pipe coil extension

Rated thermal output	kW	---
Efficiency	%	---



#### Reheater box

Rated thermal output	kW	---
Efficiency	%	---



#### Hot air pipe coil extension

Rated thermal output	kW	---
Efficiency	%	---

#### Tested method DIN EN 13229

and in accordance with Regulation Art. 15a B-VG

Testing report nr.:

RRF - 29 13 3265



1. BImSchV. level 1



1. BImSchV. level 2




More informations:

# Ekko


## L 55(34).. h

In our brochure we present a wide variety of accessories.

Front view M 1:20

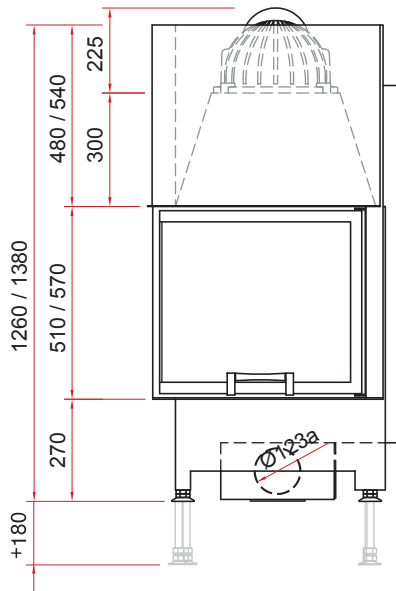

Side view M 1:20

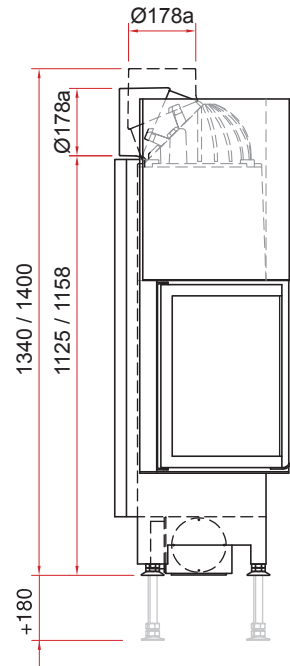

Top view M 1:10

